
Manufactured with superior quality and exceptional value, SINOLIFT hand pallet trucks are support by an extensive dealer and field support network located throughout the world. Don't forget to ask your local SINOLIFT dealer about details on factory retail programs, financing plans and additional options and dealer services like planned maintenance and operator training.

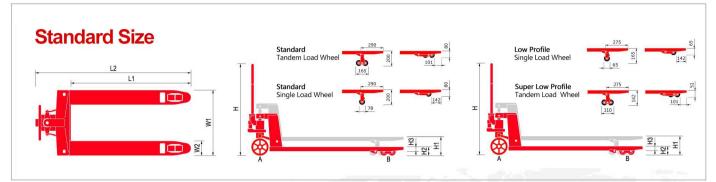

1	Ctandard
٠.	Standard

1, Standard								
Model	Capacity	Fork Width	Fork Length	Min. Height	Max. Height	Steer wheel	Load Wheel	Weight
	kg/lbs	mm/inch	mm/inch	mm/inch	mm/inch	(mm)	(mm)	kg/lbs
		W1	L1	H2	H1	Α	В	
NA15-48		460/18"	810/32"	80/3.15"	200/7.9"	φ180*62	φ78*100 (single)	66/145
NA15-49		460/18"	980/38.5"					70/154
NA15-58		520/20.5"	810/32"					66/145
NA15-59		520/20.5"	980/38.5"					70/154
NA15-510	1500/3300	520/20.5"	1070/42"					71/156
NA15-511	1500/5500	520/20.5"	1150/43.3"	00/3.15				73/160
NA15-610	- 1	600/23.5"	1070/42"					77/169
NA15-76		685/48"	650/25.6"					68/149
NA15-710		685/27"	1070/42"					76/167
NA15-712		685/27"	1220/48"					79/173
NA25-58		520/20.5"	810/32"	80/3.15"	200/7.9"	φ180*62	φ78*100 (single) or φ78*70 (tandem)	67/147
NA25-59		685/27"	980/38.5"					71/156
NA25-510	2500/5500	685/27"	1070/42"					72/158
NA25-511		520/20.5"	1150/43.3"					75/165
NA25-712		685/27"	1220/48"					80/176
NA30-510		520/20.5"	1070/42"				φ78*100 (single) or φ78*70 (tandem)	84/184
NA30-511	3000/6600	520/20.5"	1150/43.3"	80/3.15"	200/7.9"	φ180*62		90/198
NA30-712		685/27"	1220/48"				Ψτο το (tandeill)	100/220

2, Low Profile

	Capacity	Fork Width	Fork Length	Min. Height	Max. Height	Steer wheel	Load Wheel	Weight
Model	kg/lbs	mm/inch	mm/inch	mm/inch	mm/inch	(mm)	(mm)	kg/lbs
		W1	L1	H2	H1	Α	В	
NPL15-58		520/20.5"	820/32"	65/73/75 - 2.5"/2.75"/2.9"	165/175/185 6.5"/6.89"/7.3"	φ180*62	φ65*100 (single)	66/145
NPL15-59		520/20.5"	990/38.5"					70/154
NPL15-510	1500	520/20.5"	1080/42"					71/156
NPL15-511		520/20.5"	1160/43.3"					73/160
NPL15-712		685/27"	1230/48"					79/173
NPL25-58		520/20.5"	820/32"	65/73/75 - 2.5"/2.75"/2.9"	165/175/185 6.5"/6.89"/7.3"	φ180*62	φ65*100 (single)	67/147
NPL25-59		520/20.5"	990/38.5"					71/156
NPL25-510	2500	520/20.5"	1080/42"					72/158
NPL25-511		520/20.5"	1160/43.3"					73/160
NPL25-712		685/27"	1230/48"					80/176

3, Super Low Profile

	Capacity	Fork Width	Fork Length	Min. Height	Max. Height	Steer wheel	Load Wheel	Weight
Model	kg/lbs	mm/inch	mm/inch	mm/inch	mm/inch	(mm)	(mm)	kg/lbs
		W1	L1	H2	H1	Α	В	
NPSL10-58		520/20.5"	820/32"			φ150*62	φ40*90 (single,Iron)	66/145
NPSL10-59	1	520/20.5"	990/38.5"	40/1.6"	105/4.15"			70/154
NPSL10-510	1000/2200	520/20.5"	1080/42"					71/156
NPSL10-511		520/20.5"	1160/43.3"					73/160
NPSL10-712		685/27"	1230/48"					79/173
NPSL25-58		520/20.5"	820/32"		142/5.5"	φ180*62	φ50*70 (tandem,lron)	67/147
NPSL25-59]	520/20.5"	990/38.5"	51/2"				71/156
NPSL25-510	2500/5500	520/20.5"	1080/42"					72/158
NPSL25-511		520/20.5"	1160/43.3"					74/162
NPSL25-712		685/27"	1230/48"	1				80/176

Option:

- 1) Variety size of polyurethane, nylon and rubber steer wheel, single or tandem load roller of polyurethane, nylon and iron.
- 2) Stainless steel, zinc or hot-galvanized type.
- 3) Be equipped with scale, load bracket, brake and etc.
- 4) Super long and wide forks size, roll pallet truck and rough terrain pallet truck.



NA/NAL/NASL Series

PREMIUM HAND PALLET TRUCK ISO9001

CE



SHANGHAI SINOLIFT EQUIPMENT CO., LTD.

ADDRESS: No. 2471 Dachuan Road, Nanhui Industry Park, Pudong New District, Shanghai, 201399,P.R.China

Tel: 0086-21-68014500 or 0086-21-58003681

Fax: 0086-21-68014262


Website: www.sinolift.com www.sinoliftchina.com

Skype: sinolift

Whatsapp & Mobile: 0086 138 1757 2420





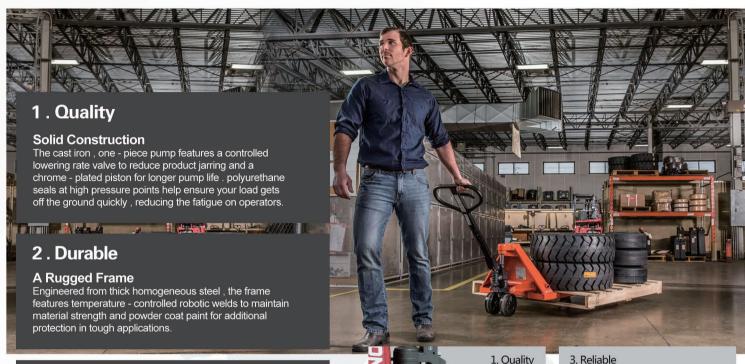

3. Reliable

Easy - to - use

Steel entry brackets and a trouble - free entry / exit roller system provide ease of entry when moving pallets, Adjustable push rods on the reinforced "C" - channel forks resist twisting under heavy loads , making the hand pallet truck easy - to - use in a variety of applications

4. Comfortable

Ergonomic Handle

Designed to reduce operator fatigue and improve productivity the truck 's handle features a neutral setting and a spring that returns the handle into an upright position when release







Wheel Configuration – Hand Pallet Truck

Nylon

Choose nylon pallet truck steer wheels for low rolling resistance and long life at a low cost.



Polyurethane

Choose polyurethane treaded pallet truck steer wheels for quiet running and better grip.



Steel

Choose steel steer wheels for harsh working environments such as metal working areas.



Rubber

Choose solid rubber treaded steer wheels for quiet running over uneven surfaces.

Load Wheels

Standard fitment on our hand pump trucks is the single load wheel for smooth operation on uneven surfaces and crossing sills choo

choose tandem		
Single	Tandem	



Tiller Options

Hydraulic Hand Pallet Truck

The SINOLIFT Hand Pallet Truck (HPT) is a great value for light duty material handling. The maneuverability of the HPT allows for better utilization of space in storage and production areas. The HPT's ability to handle tough loads and long runs with ease, re-assures owners that they have purchased a quality hand pallet truck. Experience the performance and cost saving benefits of using the SINOLIFT Hand Pallet Truck today!



3 Function Handle Control

Bullet Connection Between Steering Shaft and Pump Piston

> Exclusive Endura Pump is Sealed for Long Life

Protective Nylon Steer Wheels





Tapered Forks







3 position spring-loaded pump handle with leakproof hydraulic system delivers dependable performance for lifting, neutral and lowering the load.



11-gauge steel forks with powder-coat paint finish, Tapered ends provide smooth entry into pallets.



Robotic welding technology provides superior finish and overall structural durability



All back forks have strengthening units to ensure durability of the truck



Entry rollers prevent physical exertion of the operator and protect load rollers and pallet.



Overload release valve will protect the pallet jack truck from over loading by opening the release valve.



All pivot points are greased ensuring excellent maneuverability with effortless steering.



Top quality Japanese origin seal kit makes the hydraulic system virtually maintenance free and long lasting.