
Manufactured with superior quality and exceptional value, SINOLIFT hand pallet trucks are support by an extensive dealer and field support network located throughout the world. Don't forget to ask your local SINOLIFT dealer about details on factory retail programs, financing plans and additional options and dealer services like planned maintenance and operator training.

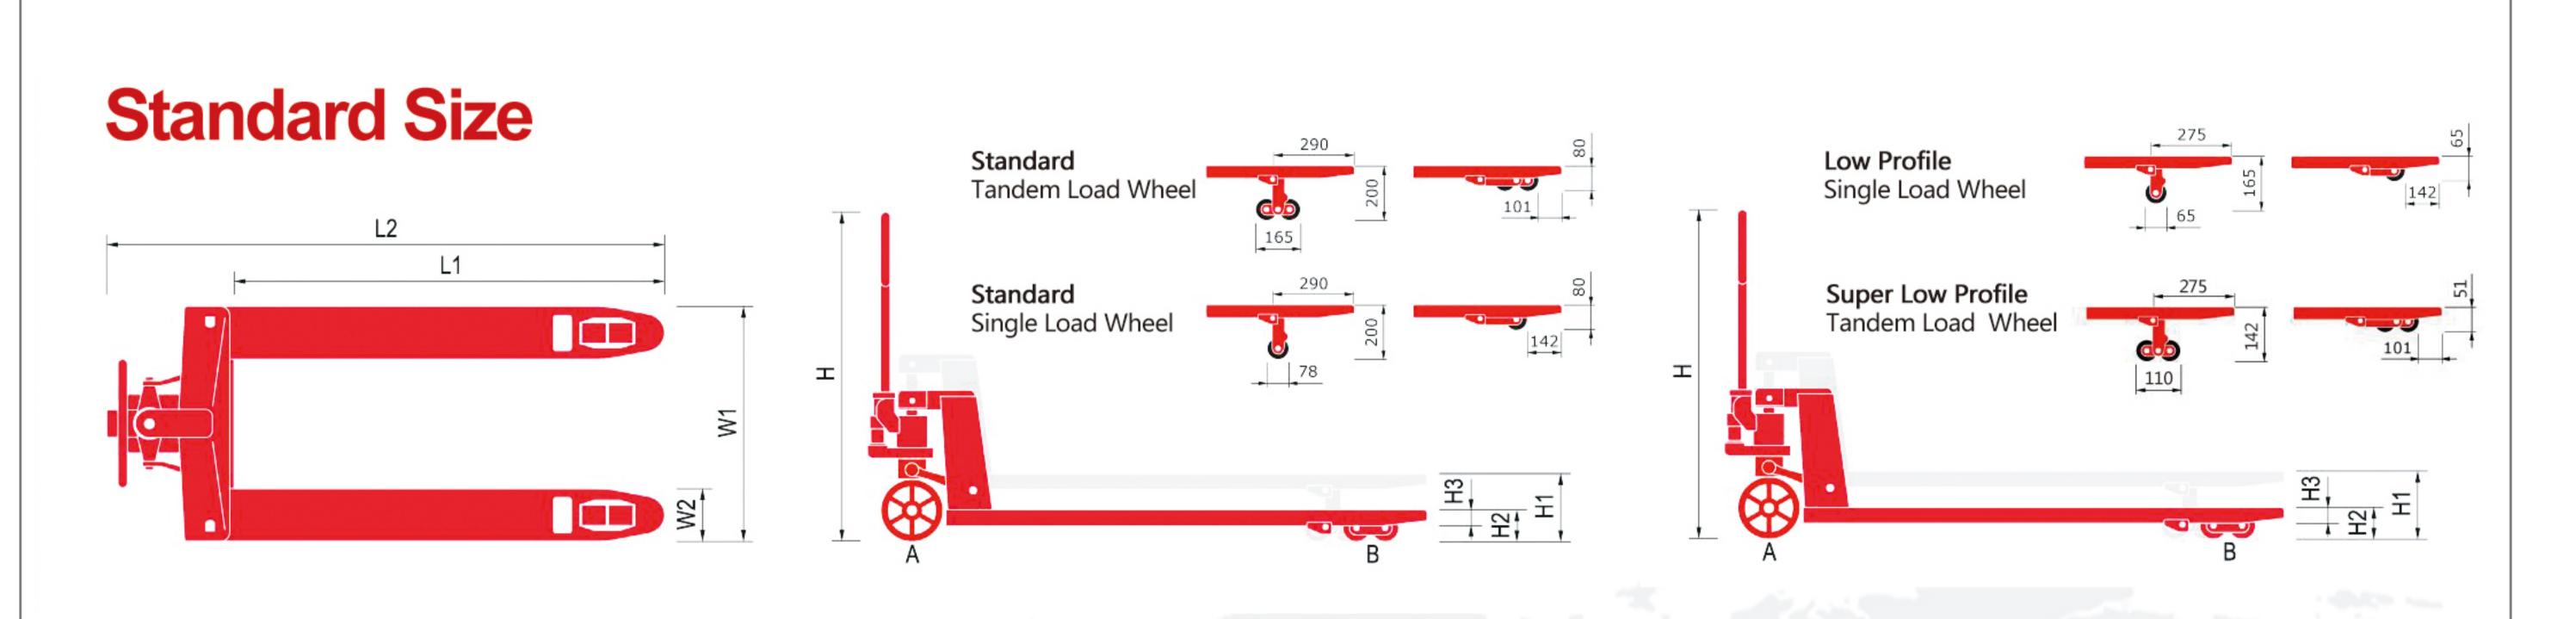

Model	Capacity	Fork Width	Fork Length	Min. Height	Max. Height	Steer wheel	Load Wheel	Weight
	kg/lbs	mm/inch	mm/inch	mm/inch	mm/inch	(mm)	(mm)	kg/lbs
		W1	L1	H2	H1	Α	В	
NF15-48		460/18"	810/32"	80/3.15"	200/7.9"	φ180*50	φ78*100 (single)	66/145
NF15-49		460/18"	980/38.5"					70/154
NF15-58	1500/3300	520/20.5"	810/32"					66/145
NF15-59		520/20.5"	980/38.5"					70/154
NF15-510		520/20.5"	1070/42"					71/156
NF15-511		520/20.5"	1150/43.3"					73/160
NF15-610		600/23.5"	1070/42"					77/169
NF15-76		685/48"	650/25.6"					68/149
NF15-710		685/27"	1070/42"					76/167
NF15-712		685/27"	1220/48"					79/173
NF25-58		520/20.5"	810/32"	80/3.15"	200/7.9"	φ180*50	φ78*100 (single) or φ78*70 (tandem)	67/147
NF25-59		685/27"	980/38.5"					71/156
NF25-510	2500/5500	685/27"	1070/42"					72/158
NF25-511		520/20.5"	1150/43.3"					75/165
NF25-712		685/27"	1220/48"					80/176
NF30-510	3000/6600	520/20.5"	1070/42"	80/3.15"	200/7.9"	φ180*50	φ78*100 (single) or φ78*70 (tandem)	84/184
NF30-511		520/20.5"	1150/43.3"					90/198
NF30-712		685/27"	1220/48"					100/220

2, Low Profile								
Model	Capacity	Fork Width	Fork Length	Min. Height	Max. Height	Steer wheel	Load Wheel	Weight
	kg/lbs	mm/inch	mm/inch	mm/inch	mm/inch	(mm)	(mm)	kg/lbs
		W1	L1	H2	H1	Α	В	
NFL15-58		520/20.5"	820/32"	65/73/75 2.5"/2.75"/2.9"	160/175/185 6.3"/6.89"/7.3"	φ180*50		66/145
NFL15-59		520/20.5"	990/38.5"					70/154
NFL15-510	1500	520/20.5"	1080/42"				φ65*100 (single) or	71/156
NFL15-511	1500	520/20.5"	1160/43.3"				φ65*70 (tandem)	73/160
NFL15-712		685/27"	1230/48"					79/173
NFL25-58		520/20.5"	820/32"					67/147
NFL25-59		520/20.5"	990/38.5"	65/73/75		400+50		71/156
NFL25-510	2500	520/20.5"	1080/42"		160/175/185		φ65*100 (single) or	72/158
NFL25-511	2500	520/20.5"	1160/43.3"	2.5"/2.75"/2.9"	6.3"/6.89"/7.3"	φ180*50	φ65*70 (tandem)	73/160
NFL25-712		685/27"	1230/48"					80/176

3, Super Low Profile

Model	Capacity	Fork Width	Fork Length	Min. Height	Max. Height	Steer wheel	Load Wheel	Weight
	kg/lbs	mm/inch	mm/inch	mm/inch	mm/inch	(mm)	(mm)	kg/lbs
		W1	L1	H2	H1	Α	В	
NFSL10-58	1000/2200	520/20.5"	820/32"	40/1.6"	105/4.15"	φ150*50		66/145
NFSL10-59		520/20.5"	990/38.5"					70/154
NFSL10-510		520/20.5"	1080/42"				φ40*90	71/156
NFSL10-511		520/20.5"	1160/43.3"				(single,Iron)	73/160
NFSL10-712		685/27"	1230/48"					79/173
NFSL25-58		520/20.5"	820/32"					67/147
NFSL25-59	2500/5500	520/20.5"	990/38.5"	51/2"	142/5.5"	φ180*50		71/156
NFSL25-510		520/20.5"	1080/42"				φ50*70	72/158
NFSL25-511		520/20.5"	1160/43.3"				(tandem, Iron)	74/162
NFSL25-712		685/27"	1230/48"					80/176

Option:

- 1) Variety size of polyurethane, nylon and rubber steer wheel, single or tandem load roller of polyurethane, nylon and iron.
- 2) Stainless steel, zinc or hot-galvanized type.
- 3) Be equipped with scale, load bracket, brake and etc.
- 4) Super long and wide forks size, roll pallet truck and rough terrain pallet truck.

Spercial size of width and length can be made according to customer's requirement, All specifications and figures are subject to change withou notice for improvement.



NF\NFSL Series

PREMIUM HAND PALLET TRUCK ISO9001



SHANGHAI SINOLIFT EQUIPMENT CO., LTD.

ADDRESS: No. 2471 Dachuan Road, Nanhui Industry Park, Pudong New District, Shanghai, 201399,P.R.China

Tel: 0086-21-68014500 or 0086-21-58003681

Fax: 0086-21-68014262


Website: www.sinolift.com www.sinoliftchina.com

Skype: sinolift

Whatsapp & Mobile: 0086 138 1757 2420





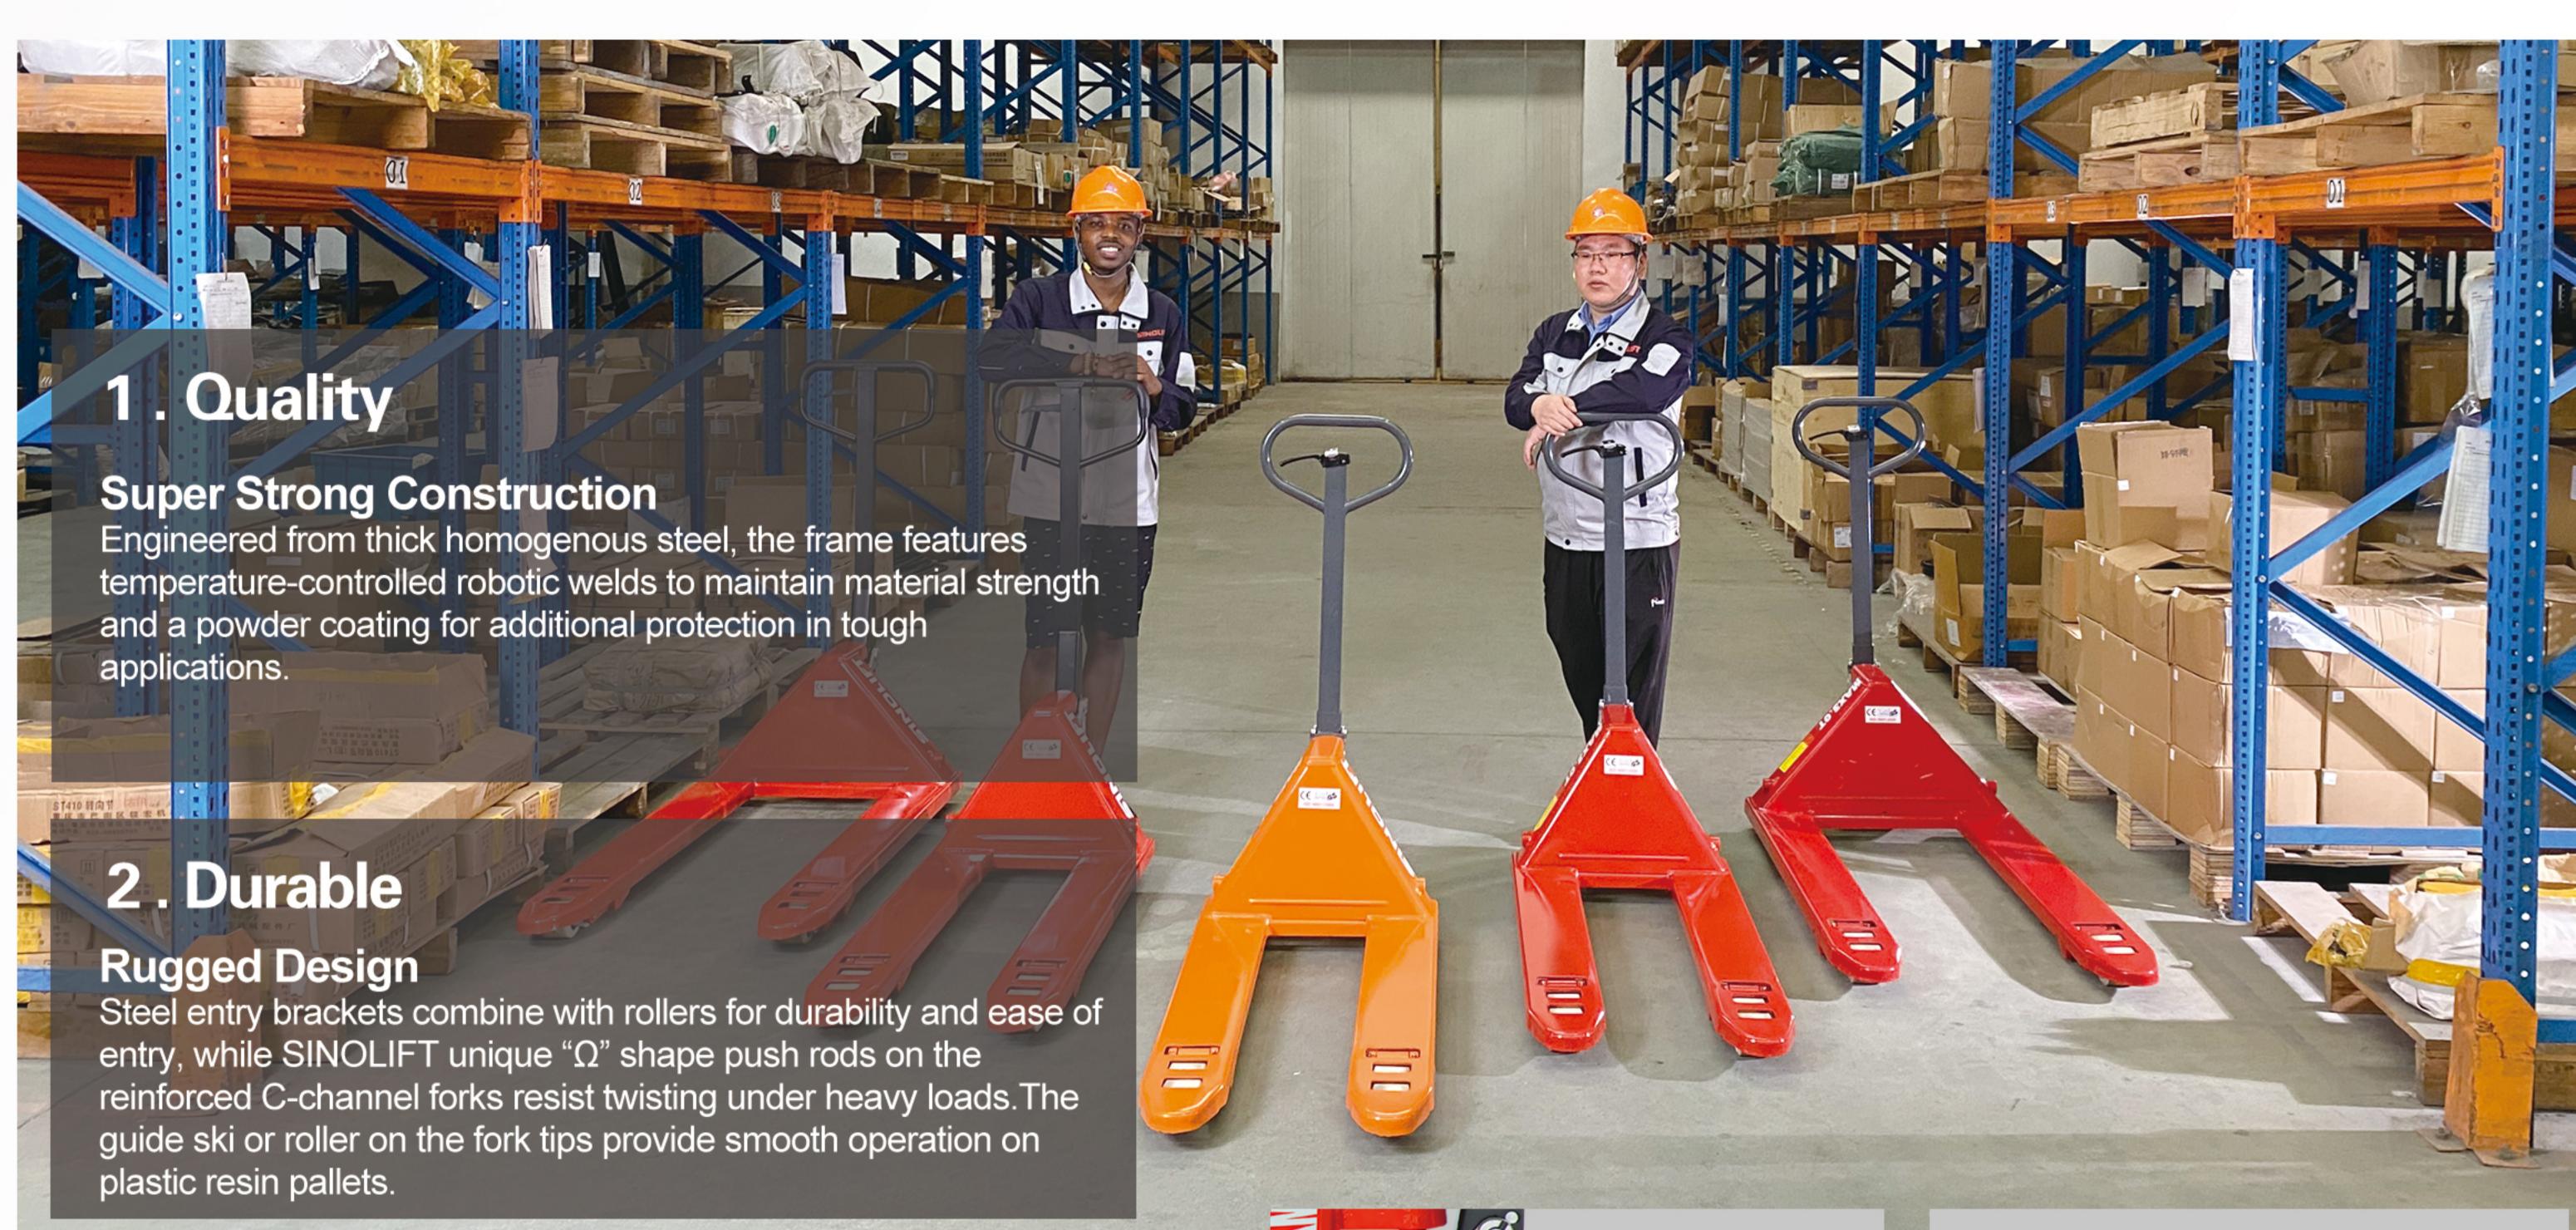

3. Reliable


One-Piece Pump

The cast iron, one-piece pump features a controlled lowering rate valve to reduce product jarring and a chrome-plated piston for longer pump life. Polyurethane seals at high pressure points help ensure loads get off the ground quickly.

4. Comfortable

Ergonomic Handle

Designed to reduce fatigue and improve productivity, the ergonomic handle features a neutral setting for easy maneuvering and a handle return spring that returns the handle to an upright position when released.

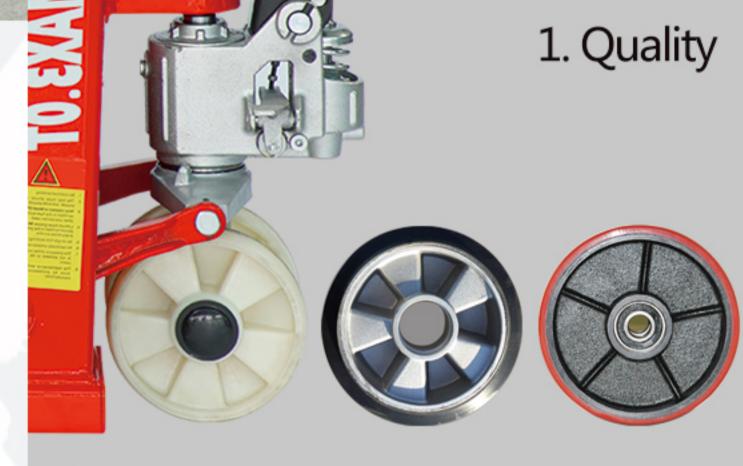







Wheel Configuration – Hand Pallet Truck



Nylon

Choose nylon pallet truck steer wheels for low rolling resistance and long life at a low cost.



Polyurethane

Choose polyurethane treaded pallet truck steer wheels for quiet running and better grip.



Steel

Choose steel steer wheels for harsh working environments such as metal working areas.



Rubber

Choose solid rubber treaded steer wheels for quiet running over uneven surfaces.

Load Wheels

Standard fitment on our hand pump trucks is the single load wheel for smooth operation on uneven surfaces and crossing sills choose tandem load wheels.




Tandem



Tiller Options





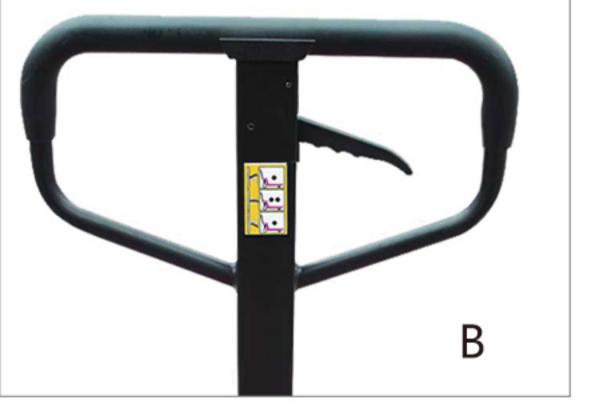

Hydraulic Hand Pallet Truck

The SINOLIFT Hand Pallet Truck (HPT) is a great value for light duty material handling. The maneuverability of the HPT allows for better utilization of space in storage and production areas. The HPT's ability to handle tough loads and long runs with ease, re-assures owners that they have purchased a quality hand pallet truck. Experience the performance and cost saving benefits of using the SINOLIFT Hand Pallet Truck today!

Tapered Forks

Loop Handle for Comfort Powder Coating Finish Provides Ultimate Corrosion Resistance Non-Marriong Load Rollers Entry Roller

3 Function Handle Control

Bullet Connection Between Steering Shaft and Pump Piston

> **Exclusive Endura** Pump is Sealed for Long Life

Protective Nylon Steer Wheels











3 position spring-loaded pump handle with leakproof hydraulic system delivers dependable performance for lifting, neutral and lowering the load.



11-gauge steel forks with powder-coat paint finish, Tapered ends provide smooth entry into pallets.



Robotic welding technology provides superior finish and overall structural durability




All back forks have strengthening



Entry rollers prevent physical exertion of the operator and protect load rollers and pallet.



Overload release valve will protect the pallet jack truck from over loading by opening the release valve.

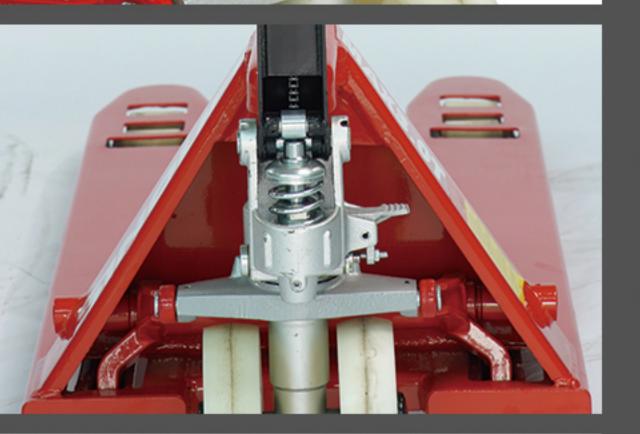

All pivot points are greased ensuring excellent maneuverability with effortless steering.



Top quality Japanese origin seal kit makes the hydraulic system virtually maintenance free and long lasting.