

# **HL20S HL25S**

Stainless Steel Hand Pallet Truck with Scale ISO9001

îF



# SHANGHAI SINOLIFT MECHANICAL AND ELECTRICAL EQUIPMENT CO.,LTD

ADDRESS: No. 2471 Dachuan Road, Nanhui Industry Park, Pudong New District, Shanghai, 201399,P.R.China Tel: 0086-21-68014500 or 0086-21-58003681

Fax: 0086-21-68014262

Website: www.sinolift.com www.sinoliftchina.com

Skype: sinolift

Whatsapp & Mobile: 0086 138 1757 2420



## **HL-Hand Pallet Jack Scale**

## Stainless Steel Hand Pallet Truck with Scale

The ideal pallet truck to handle loads in humid and damp conditions. In particular, the stainless steel model is suitable for environments where high hygienic standards are enforced, such as the chemical, pharmaceutical or food & beverage industry.


Characterized by their great resistance to corrosion, the galvanized and stainless steel hand pallet trucks are perfect for working in humid conditions or environments where high hygiene standards must be respected.









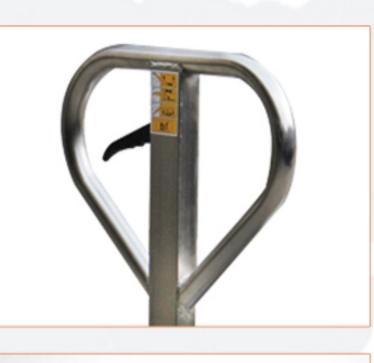

## Stainless Steel Ergonomic Handle

Truck has a spring-loaded handle with a three position lever control (raise, lower, neutral) for easy operation and maneuvering.



#### **Maximum Precision**

The positioning of the weighing cells at the 4 end points of the forks ensures extremely precise weight recording up to a slanting position of 2°.



### Multiple function keys

Its large-sized 6 digits LCD display provides accurate and precise weighing in kg and lb. Its software allows not only net/gross/tare weighing but also unit counting, adding and totalling of multiple loads. Weights are shown in 1 kg/lb steps with 0,05% precision.



### **Built-in Rechargeable Battery**

Built-in 4000mAH super-capacity rechargeable battery with the advantages of durability and convenient charging, without disassembly. It lasts 3 months on a single battery charge, and the operating current is only 1ma (on the premise that backlight and printer connection are turned off).




### High quality Wheels

Steering wheels and double roller wheels with paneling made of nylon, which is durable and more labor-saving which is suitable for uneven ground



## Easy Cleaning and High Resistance to Corrosion

Continuous welding, machinery and welding dust are cleaned by glass-fibre blasting process. Open fork, maximum hygienic, avoid hiding places for bacteria and allow an integral daily cleaning.

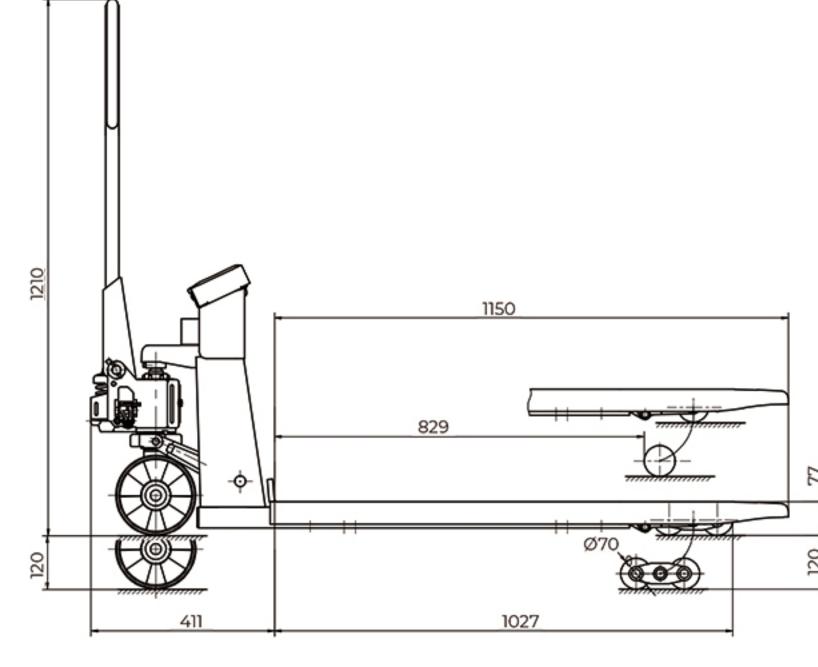

411	1027	
102°		20
	R1350	540
1020		20

<b>Model designation</b>			HL20S (metric)	HL20S (imperical)	HL25S (metric)	HL25S (imperical)
Material			Stainless steel	Stainless steel	AC stainless	AC stainless
Capacity	kg	lbs	2000	4400	2500	5500
Fork height	mm	in	80-205	3.1-8	80-205	3.1-8
Steering wheel	mm	in	φ180x50	7x2	φ180x50	7x2
Single load roller	mm	in	φ74x93	2.9x3.6	φ74x93	2.9x3.6
Tandem load roller	mm	in	φ74x70	2.9x2.75	φ74x70	2.9x2.75
Size of fork	mm	in	160x60	6.3x2.36	160x60	6.3x2.36
Width over forks	mm	in	550/680	21.6/27	550/680	21.6/27
Fork length	mm	in	1150/1220	45/48	1150/1220	45/48
Battery			DC 6v/4.5ah	DC 6v/4.5ah	DC 6v/4.5ah	DC 6v/4.5ah
Charger			100V-240V	100V-240V	100V-240V	100V-240V
N.W	kg	lbs	106/108	233/238	122/124	268/273

Ingress Protection Standard System IP65; Indicator IP67
Automatic Switch-off Standard After 15 minutes
Graduation 500-2200kg: 1kg
200-500kg: 0.5kg

0-200kg: 0.2kg

Maximum inaccuracy ±1% applied weight



printing weight data on site is available on request.



Suitable for application in explosion hazardous area, protection according to ATEX II 2GD IIB T4T197°C X (Zones 1 and 21 & 2